



# HT66-166M

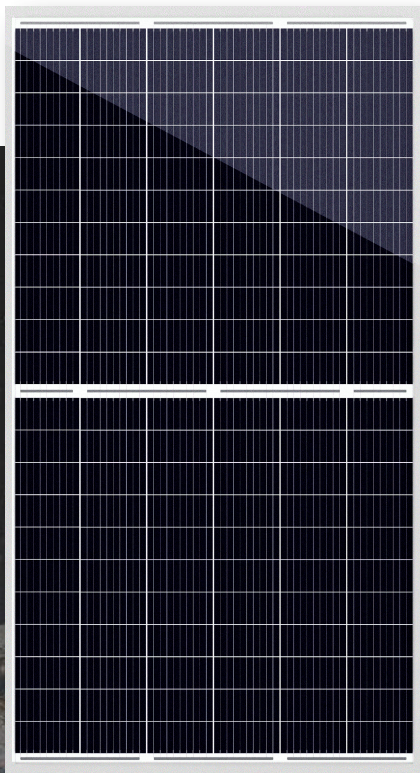

132-cell Mono Half Cell PV-Module

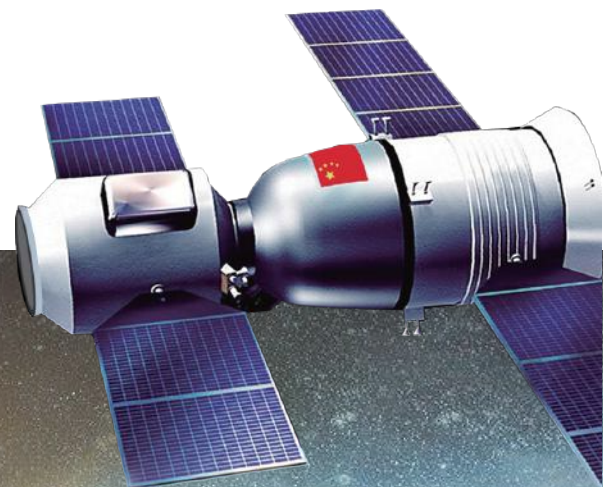

400W - 415W

## WARRANTY


12  
years

Products  
Warranty

25  
years

Warranty on  
power output

## CERTIFICATES



## QUALITY BENEFITS



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption.



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs.



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

5W

Positive tolerance 0/+5w guaranteed.

EL

Microcrack resistant enhance reliability, triple EL tested of high quality control.



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa).

PID


PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016, IEC61730: 2016 Latest Standard  
ISO9001, ISO14001 and OHSAS18001,  
meeting the highest international standards Strict quality control

MULTIWAY+

### Engineering Drawing

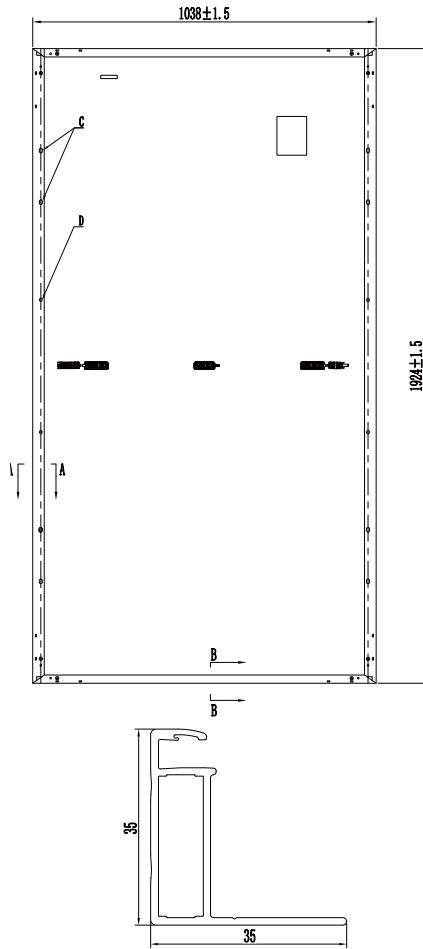

### Electrical Characteristics

Module	HT66-166M			
Maximum Power at STC(Pmax)	400W	405W	410W	415W
Open-Circuit Voltage(Voc)	45.5V	45.6V	45.7V	45.8V
Short-Circuit Current(Isc)	11.54A	11.67A	11.80A	11.93A
Optimum Operating Voltage (Vmp)	37.9V	38.0V	38.1V	38.2V
Optimum Operating Current(Imp)	10.66A	10.66A	10.77A	10.88A
Module Efficiency	20.0%	20.3%	20.5%	20.8%
Power Tolerance	0 ~ +5W			
Maximum System Voltage	1000V / 1500V DC(IEC)			
Maximum Series Fuse Rating	20A			
Operating Temperature	-40 °C to +85 °C			

\*STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25, AM=1.5  
Optional black frame or white frame module according to customer requirements

### NMOT

Module	HT66-166M			
Maximum Power	296W	300W	304W	307W
Open Circuit Voltage (Voc)	43.0V	43.1V	43.2V	43.3V
Short Circuit Current (Isc)	9.32A	9.42A	9.53A	9.63A
Maximum Power Voltage (Vmp)	35.8V	35.9V	36.0V	36.1V
Maximum Circuit Current (Imp)	8.27A	8.36A	8.44A	8.50A
NOCT	45°C±2°C			


\*NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1 m/s

### Mechanical Characteristics

Solar Cells	Monocrystalline 166 × 83 mm
No. of Cells	132 (6 × 22)
Dimensions	1924mm×1038mm×35mm
Weight	22.0 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm <sup>2</sup> (IEC) Length: (+)200mm, (-)300mm
Connectors	MC Compatible
Packaging Configuration	31pcs / box, 744pcs / 40'HQ Container

### I-V Curves


Current-Voltage & Power-Voltage Curve

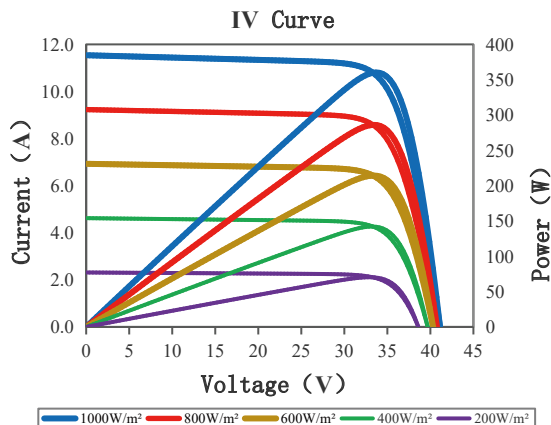

### Temperature Characteristics

Temperature Coefficient of Pmax	$\gamma$ (Pm)	-0.39%/K
Temperature Coefficient of Voc	$\beta$ (Voc)	-0.29%/K
Temperature Coefficient of Isc	$\alpha$ (Isc)	0.049%/K

### Warranty

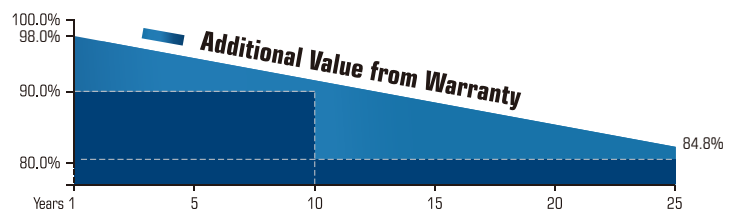

12-year Product Warranty

25-year Linear Performance Warranty

