


HT78-18X(PD)-F

NEW

Large wafer

580W/585W

590W/595W/600W

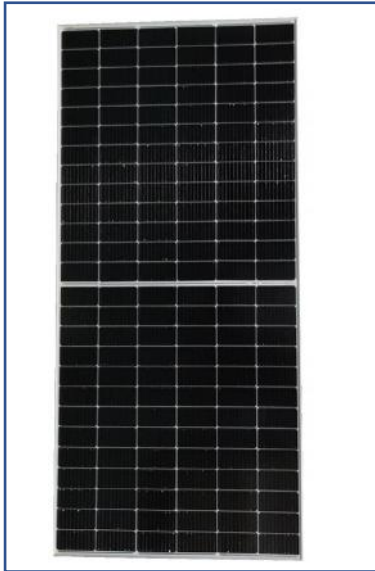

- Module Efficiency: 21.4%
- No. of Cells 156(6×26)
- Weight 35.5kg
- Dimensions 2470mm×1134mm×35mm
- monocrystalline 182×91mm

MULTIWAY+



Shanghai Aerospace Automobile Electromechanical Co., Ltd.
Website: www.ht-saae.com
E-mail: pvmarketing@ht-saae.com



Factory:
Lianyungang Shenzhou New Energy CO., Ltd.
Turkey HT Solar Energy Joint Stock Company



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption.



1500V

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

12Ys

Products warranty

30Ys

Warranty on power output



2%

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.

5W

Positive tolerance 0/+5w guaranteed




Entire module certified to with stand extreme wind(2400 Pa) and snow loads (5400 Pa)

Anti PID

PID resistant

Comprehensive and first-rate certification system

IEC 61215:2016, IEC 61730:2016 Latest Standard ISO 9001, ISO 14001 and ISO 45001, meeting the highest international standards Strict quality control



Electrical Characteristics (STC)

Module Type	HT78-18X(PD)-F				
Maximum Power(Pmax)	580W	585W	590W	595W	600W
Open Circuit Voltage(Voc)	53.49V	53.64V	53.79V	53.94V	54.09V
Short Circuit Current(Isc)	13.82A	13.89A	13.96A	14.03A	14.10A
Maximum Power Voltage(Vmp)	44.98V	45.13V	45.28V	45.43V	45.58V
Maximum Power Current(Imp)	12.90A	12.97A	13.04A	13.11A	13.17A
Module Efficiency	20.7%	20.9%	21.1%	21.2%	21.4%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				

* STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C


Electrical Characteristics (NMOT)

Module Type	HT78-18X(PD)-F				
Maximum Power(Pmax)	431W	435W	439W	443W	446W
Open Circuit Voltage(Voc)	50.70V	50.84V	50.98V	51.12V	51.27V
Short Circuit Current(Isc)	11.15A	11.21A	11.27A	11.32A	11.38A
Maximum Power Voltage(Vmp)	42.63V	42.77V	42.92V	43.06V	43.20V
Maximum Power Current(Imp)	10.11A	10.17A	10.23A	10.29A	10.32A


* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Temperature Coefficient of Pmax	γ (Pm)	-0.33%/K
Temperature Coefficient of Voc	β (Voc)	-0.26%/K
Temperature Coefficient of Isc	α (Isc)	0.042%/K


Solar Cells	Monocrystalline 182× 91mm
No. of Cells	156 (6×26)
Dimensions	2470mm×1134mm×35mm
Weight	35.5kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Cable	4mm ² (IEC) Length: (+) 200mm, (-) 300mm
Connectors	MC4 / MC4 Compatible
Packaging Configuration	31 pcs/box: 496 pcs/ 40' HQ Container

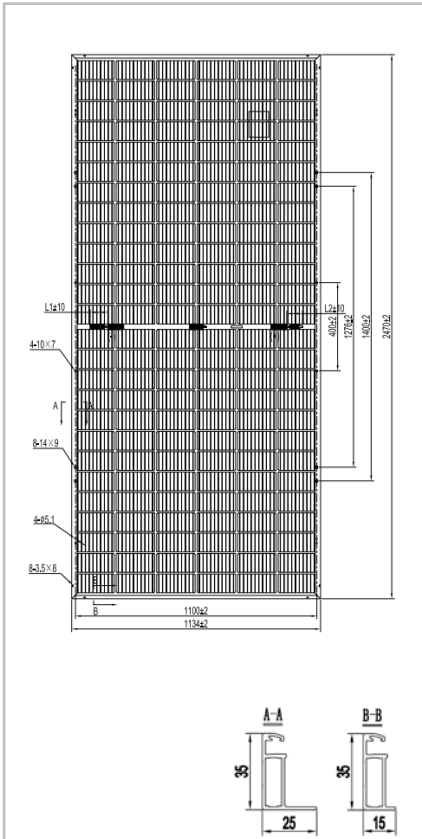

IV Curves

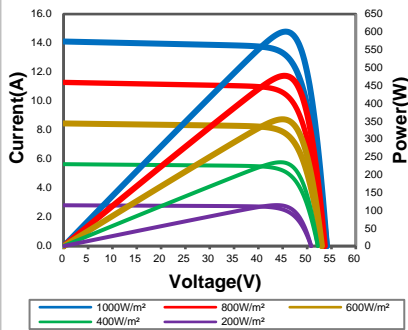

Warranty

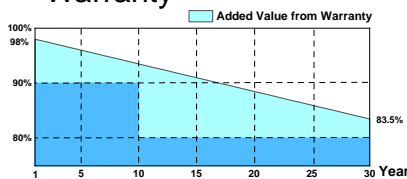

12-year product warranty*

30-year warranty on power output*

* Specific information is referred to the product quality guarantee

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright©2022V1 Plus Specifications are subject to change without further notification