

# WP-HD144N

N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

445-470W



**470W**

Maximum Power Output

**21.29%**

Maximum Module Efficiency

**0~+5W**

Power Output Guarantee



**Additional Power Generation Gain**

At least 30-year product life, more than 10%- 30% additional power gain comparing with conventional module



**Better Weak Illumination Response**

Wide spectral response, higher power output even under low-light settings like smog or cloudy days



**ZERO LID (Light Induced Degradation)**

N-type solar cell has no LID naturally, can increase power generation



**Better Temperature Coefficient**

Higher power generation under working conditions, thanks to passivating contact cell technology



**Lower LCOE**

High power and 1500V system voltage, saving BOS cost




**Wider Applicability**

BIPV, vertical installation, snowfield, high-humid area, windy and dusty area

**Wattpower Delivers Reliable Performance Over Time**

- Leader of n-type bifacial technology
- Fully automatic facility and world-class technology
- Long term reliability tests
- 100% EL inspection ensuring defect-free modules

**Linear Performance Warranty**

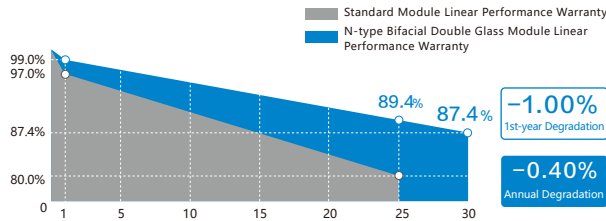

12 Years Product Material & Workmanship 30 Years Linear Performance Warranty

**Additional Insurance Backed by Munich Re**



IEC61215, IEC61730  
 ISO 9001:2015 Quality management system  
 ISO 14001 Standards for environment management system  
 OHSAS 18001 International standards for occupational health & safety

# WP-HD144N Series

## N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

### Electrical Properties | STC\*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	445	450	455	460	465	470
MPP Voltage (Vmp) (V)	41.4	41.6	41.8	42.0	42.2	42.4
MPP Current (Imp) (A)	10.75	10.82	10.89	10.96	11.02	11.09
Open Circuit Voltage (Voc) (V)	49.8	50.0	50.2	50.4	50.6	50.8
Short Circuit Current (Isc) (A)	11.36	11.43	11.50	11.56	11.62	11.69
Module Efficiency (%)	20.15	20.38	20.61	20.83	21.06	21.29

\*STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5  
The data above is for reference only and the actual data is in accordance with the practical testing

### Electrical Properties | NOCT\*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	337	340	344	348	352	356
MPP Voltage (Vmp) (V)	38.8	39.0	39.2	39.4	39.6	39.8
MPP Current (Imp) (A)	8.67	8.72	8.78	8.84	8.88	8.94
Open Circuit Voltage (Voc) (V)	47.6	47.8	48.0	48.2	48.4	48.6
Short Circuit Current (Isc) (A)	9.16	9.22	9.27	9.32	9.37	9.43

\*NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s

### Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V (IEC)
Maximum Series Fuse Rating(A)	25
Power Tolerance	0~+5W
Bifaciality*	80%

\*Bifaciality=(Pmaxrear (STC) /Pmaxfront (STC) ) , Bifaciality tolerance:±5%

### Temperature Coefficient

Temperature Coefficient of Pmax*	-0.320%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Isc	+0.046%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

\*Temperature Coefficient of Pmax±0.03%/°C

### Mechanical Properties


Cell Type	166.00mm*83.00mm
Number of Cells	144pcs(12*12)
Dimension	2111mm*1046mm*30mm
Weight	28kg
Front /Rear Glass*	2.0mm/2.0mm
Frame	Anodized Aluminium
Junction Box	IP68 (3 diodes)
Length of Cable*	4.0mm <sup>2</sup> , 300mm
Connector	MC4 Compatible

\*Heat strengthened glass  
\*Cable length can be customized




### With Different Power Generation Gain (regarding 460W as an example)

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	497	42.0	11.83	50.4	12.46
15	515	42.0	12.26	50.4	12.91
20	534	42.0	12.69	50.4	13.36
25	552	42.1	13.12	50.5	13.81
30	570	42.1	13.56	50.5	14.27

### Engineering Drawing (unit: mm)

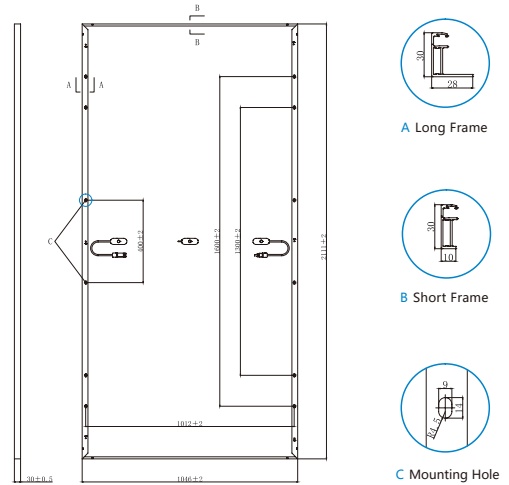

### Characteristic Curves | HD144N-460

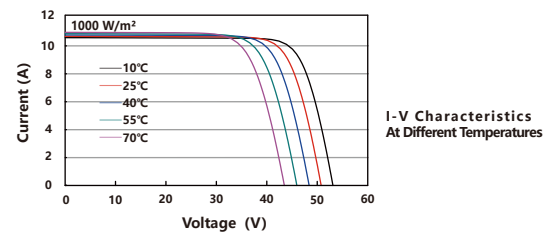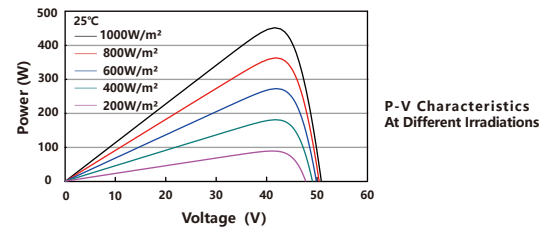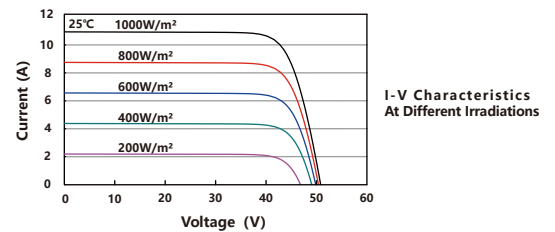

### Packaging Configuration

Packing Type	20'GP	40'GP	40'HQ
Piece/Pallet		35	
Pallet/Container	5	10	20
Piece/Container	175	350	700

